



Rain-Clik

Most rain-sensing devices must first accumulate a set amount of rainfall before a switch is activated that interrupts the circuit from the controller and shuts off the system. In that “accumulation time,” the system will continue to water, giving the appearance a precious resource is being wasted...exactly the opposite impression a municipality, a business, or an upstanding citizen would like to convey. Only the Hunter

Rain-Clik™, with its unique Quick Response™ feature, can command a controller to shut off immediately – not after a quarter- or a half-inch, but right when it starts to rain. The Rain-Clik can be mounted on an eave or any flat vertical surface like a wall or fence. A gutter mount is also available that allows for easy installation of the Rain-Clik on the edge of a gutter.



Features & Benefits



Hunter's unique Quick Response feature

No need for water to accumulate for shut-off

Rugged construction

Heavy-duty polycarbonate housing and metal extension arm

Set a maximum dry-out period

Adjust the irrigation re-start to account for varying amounts of rain

Maintenance-free patented sensing mechanism

No callbacks—just set it and forget it

Includes 25' of 20 gauge two-conductor wire

Simple to add on to a new or existing installation

Optional bypass switch

Adds flexibility to the system

5-year warranty

Hunter backs up its products with the industry's best guarantee

Models

Rain-Click – standard (normally closed switch)

Rain-Click-NO – normally open switch

RFC – Rain and freeze sensor (normally closed switch)

Dimensions

- 3¼" diameter x 2" high

Operating Specifications

- Wiring: normally closed or normally open
- Time to turn off irrigation system: 2 to 5 minutes for the Quick Response feature
- Time to reset the Quick Response unit: 4 hours maximum under dry sunny conditions
- Time to reset: 3 days maximum under dry sunny conditions for the total rainfall compensation unit
- Operating temperature: 32°F to 130°F (0°C to 54°C)
- Vent ring allows for adjustment of reset delay
- UV colorfast and stable materials
- UL listed
- Optional gutter mount for Rain-Click (order SGM)
- Freeze sensor shuts system off when temperatures fall below 37°F (Rain/Freeze-Click Model)

Electrical Specifications

- 24 volt, 3 AMP Switch



Instant Shut-off When it Rains

There are a lot of rain-sensing devices on the market today, but all of them shut off an irrigation system only when a pre-set level of accumulated water is reached. That means that even after it has started raining, a system will continue to operate, an action that can give the impression water is being wasted (not the image that a municipality wants to give its constituents as they pass by parks, roadways, and other city-owned lands). Only the Hunter Rain-Click™ products, with their unique Quick Response feature, allow an irrigation system to shut off immediately when it starts to rain.



A Variety of Mounting Options

Whether you offer a rain sensing device as an upgrade to your installations or you already install one as a standard piece of equipment, wouldn't you like to have options on where you must install it? The usual place to install a rain-sensing device has been on a flat vertical surface, such as a wall or fence. With the Hunter Rain-Click, you can also mount it on a rain gutter (Order P/N SGM).



Standard metal mounting arm



Optional gutter metal mounting arm


SPECIFICATION GUIDE

EXAMPLE: **RAIN-CLIK**

MODEL	OPTION
RAIN-CLIK	NO = Normally Open Switch
RFC = Rain/Freeze-Click	
Note: To add Bypass Switch Box to any non-Hunter controller installation, specify BPSW with sensor. Bypass switch function is standard in all Hunter controllers.	

Bypass Switch Box: Give Any Automatic Controller's Remote Sensors the Capability to Bypass

It's the easy way to put a system in the manual mode as would be needed during servicing and troubleshooting operations. Featuring a compact, heavy-duty switch mechanism, the Bypass Switch Box mounts quickly and easily with its no-strip wire connectors and supplied adhesive tape.

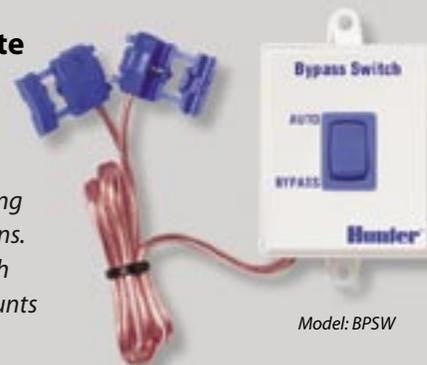

Model: BPSW